


版次	变更内容	审核	日期

9, 15, 25&37 Positions



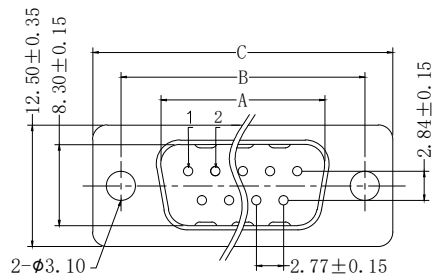


材料 (MATERIALS):

端子 (Contacts): 黄铜 (Brass)
 端子电镀 (Contact plating): 详见料号说明 (See number description)
 绝缘体 (Insulator): PBT+G, F, UL94V-0
 外壳 (Shell): 铁材 or 不锈钢 (Steel or Stainless steel)

电气说明 (ELECTRICAL SPECIFICATION):




额定电流 (Current Rating): 5 Amperes
 额定电压 (Dielectric Withstanding Voltage): AC 1000/60ses. r. m. s.
 绝缘电阻 (Insulation Resistance): 1000 MΩ Min. at DC 500V
 接触电阻 (Contact Resistance): 25 mΩ Max.
 使用温度 (Operating Temperature): -40°C~+105°C

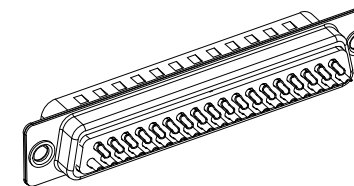

NUMBER OF CONTACTS	A	B	C
	±0.25	±0.25	±0.35
9	16.90	25.00	30.80
15	25.25	33.30	39.20
25	39.00	47.05	53.05
37	55.40	63.50	69.40


H
4.00
5.80

50 Positions

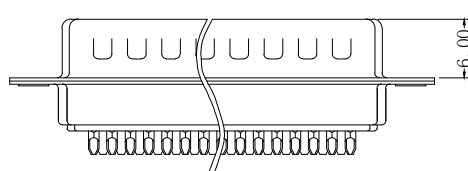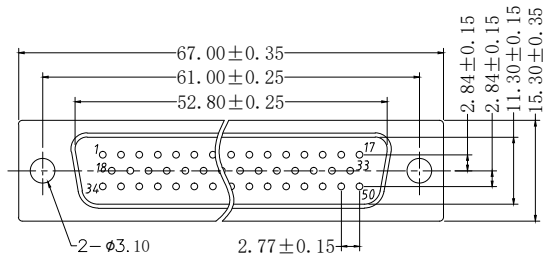

DB-xx M G-A A-1-B

芯数: 09, 15, 25, 37, 50
 极性: M: 公(针)
 电镀: S: 接触区镀金Gold Flash, 其它镀锡; G: 全镀金Gold Flash, 3G: 全镀金3u"
 螺柱长度: A: 光孔, C: 前:4.8mm/后:4.0mm, D: 5.8mm
 外壳材质: 缺省: 铁, B: 不锈钢
 塑胶颜色: 1: 白色, 2: 蓝色, 3: 黑色
 螺柱位置: A: 无, B: 前固定, E: 后固定

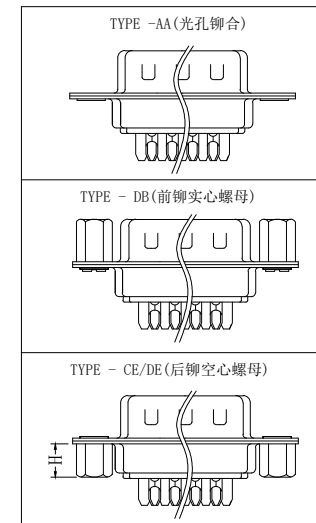

公差:	版次:	A	上海宗进电子科技有限公司 Shanghai Zong Jin Electron Technology Co.LTD		
. X ±0.35	比例:		型号: DB-xxMX-XX-X-X	签名	日期
. XX ±0.25	单位:	mm	描述: D型连接器	绘图:	
. XXX ±2°	页码:	1/1	图号:	确认:	
LNGLB	图号:			审核:	